



Protocol Converter
LonWorks®
 for ENVI®, LOVE® and NURO™ CONTROLLERS

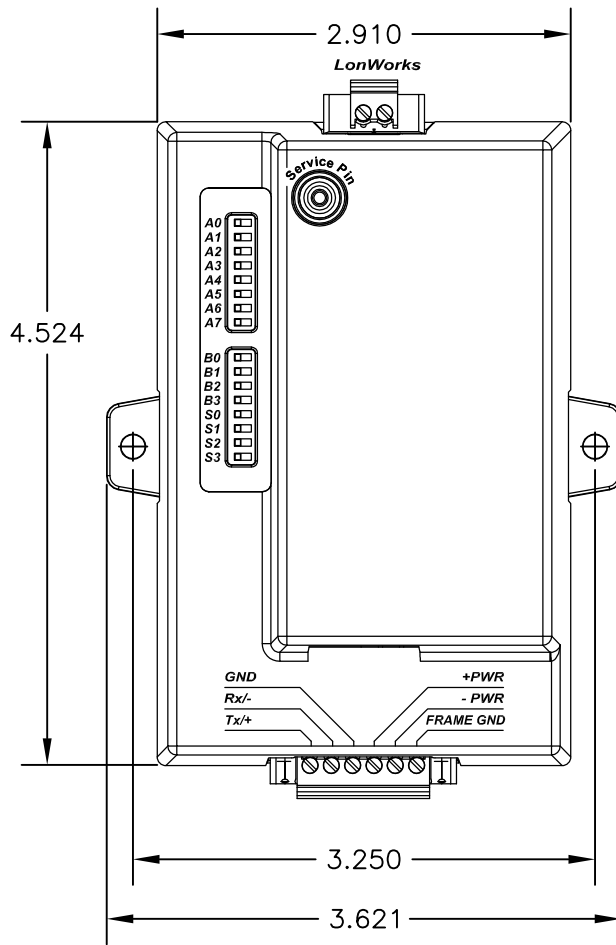

ELECTRICAL CONNECTIONS

- 2 pin Phoenix connector for LonWorks port
- Ethernet 10/100 port
- 6 pin Phoenix connector for RS-485: +/–/Ground
power: +/–/ frame ground
- DIP switches for setting MAC Address, Node ID, Baud Rate on the RS-485 Field protocol, and number of connected boilers.

DEVICES	POINT COUNT
ENVI	53
LOVE	40
NURO	31

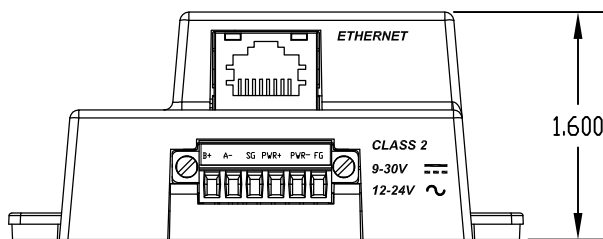

Power Requirements: 9–30VDC OR 9–24VAC
 Current Draw @ 12V: 279mA
 Operating temperature: –40°F TO 187°F (–40°C TO 85°C)
 Relative Humidity: 5–90%RH, non–condensing
 Supports up to 1500 Lonworks Registers for total device connected.

HARSCO
INDUSTRIAL

Patterson-Kelley

PROTOCOL CONVERTER LONWORKS 05.16.17
 2351 REV B

