

SL1000

20° ΔT


Return Water Temperature

	60°	80°	100°	120°	140°	160°	180°	RPM	MBtu
100%	99%	97%	94%	87%	86%	85%	85%	1000	1000
75%	99%	97%	94%	88%	86%	85%	85%	750	750
50%	99%	97%	94%	89%	86%	87%	86%	500	500
25%	100%	97%	97%	92%	87%	88%	86%	250	250




40° ΔT

	60°	80°	100°	120°	140°	160°	RPM	MBtu
100%	97%	97%	94%	91%	88%	86%	1000	1000
75%	97%	98%	95%	91%	88%	86%	750	750
50%	98%	98%	95%	92%	88%	87%	500	500
25%	100%	98%	95%	92%	89%	87%	250	250

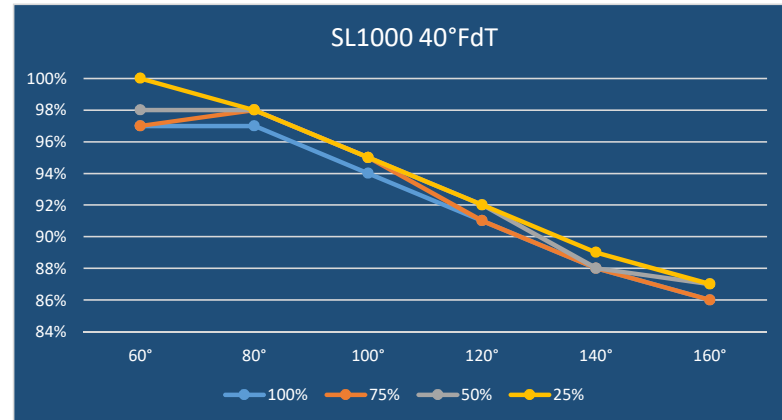

60° ΔT

	60°	80°	100°	120°	140°	RPM	MBtu
100%	98%	95%	92%	86%	86%	1000	1000
75%	98%	97%	93%	88%	86%	750	750
50%	98%	98%	93%	89%	87%	500	500
25%	100%	98%	95%	91%	88%	250	250

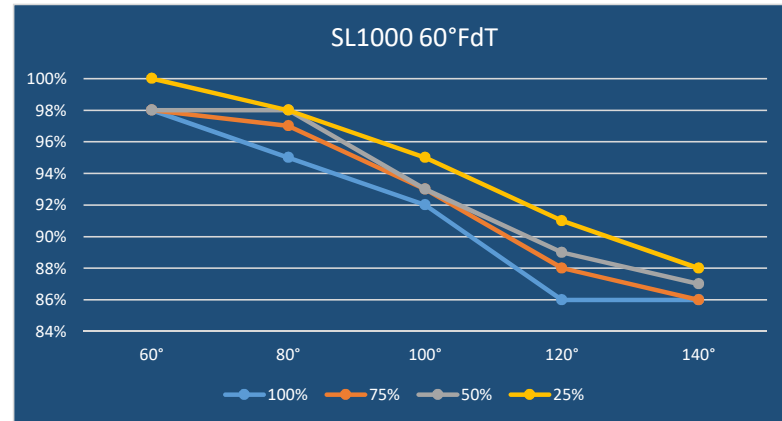


SL1500

20° ΔT

Return Water Temperature

	60°	80°	100°	120°	140°	160°	180°
100%	99%	98%	95%	88%	87%	86%	86%
75%	99%	98%	95%	89%	87%	86%	86%
50%	99%	98%	95%	90%	87%	88%	87%
25%	100%	98%	98%	93%	88%	89%	87%


RPM
1500
1125
750
375

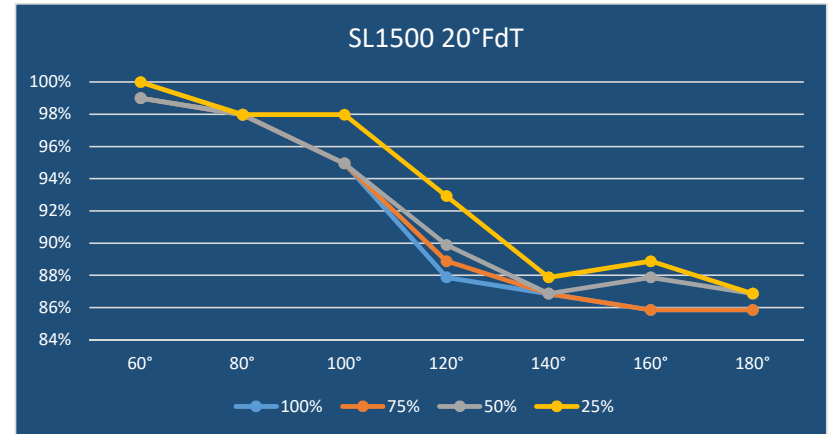

40° ΔT

	60°	80°	100°	120°	140°	160°
100%	98%	98%	95%	92%	89%	87%
75%	98%	99%	96%	92%	89%	87%
50%	99%	99%	96%	93%	89%	88%
25%	100%	99%	96%	93%	90%	88%


RPM
1500
1125
750
375

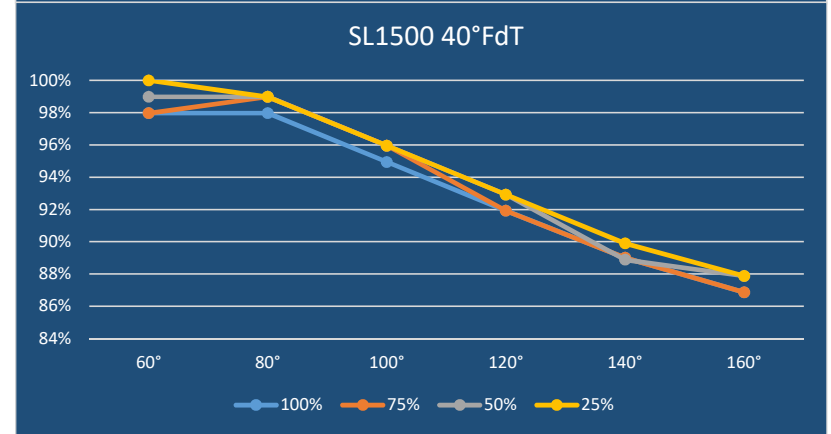

60° ΔT

	60°	80°	100°	120°	140°
100%	99%	96%	93%	87%	87%
75%	99%	98%	94%	89%	87%
50%	99%	99%	94%	90%	88%
25%	100%	99%	96%	92%	89%

RPM
1500
1125
750
375

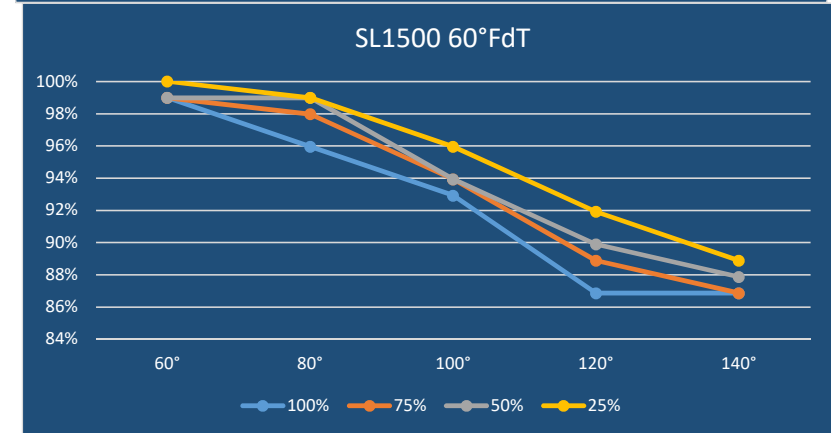


SL2000

Return Water Temperature

20° ΔT

	60°	80°	100°	120°	140°	160°	180°
100%	99%	97%	94%	87%	86%	85%	85%
75%	99%	97%	94%	88%	86%	85%	85%
50%	99%	97%	94%	89%	86%	87%	86%
25%	100%	97%	97%	92%	87%	88%	86%


RPM
2000
1500
1000
500

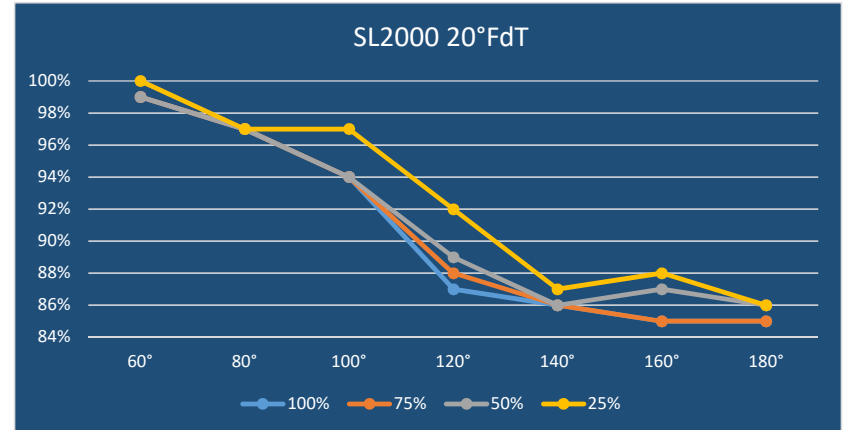

40° ΔT

	60°	80°	100°	120°	140°	160°
100%	97%	97%	94%	91%	80%	86%
75%	97%	98%	95%	91%	80%	86%
50%	98%	98%	95%	92%	88%	87%
25%	100%	98%	95%	92%	89%	87%


RPM
2000
1500
1000
500

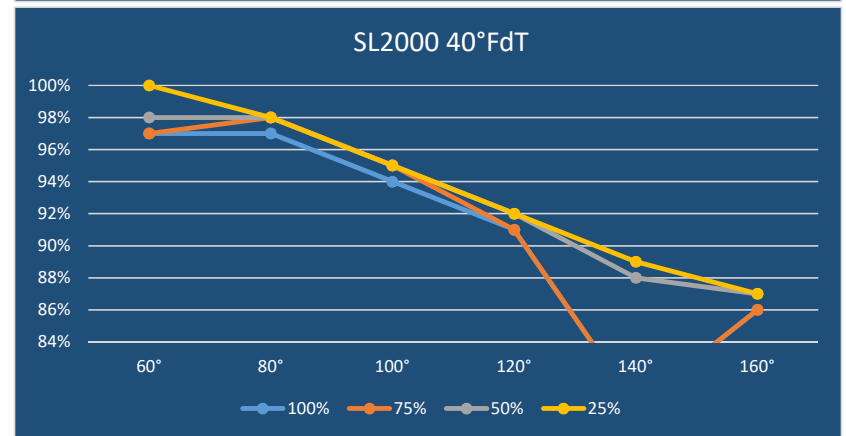

60° ΔT

	60°	80°	100°	120°	140°
100%	98%	95%	92%	86%	86%
75%	98%	97%	93%	88%	86%
50%	98%	98%	93%	89%	87%
25%	100%	98%	95%	91%	88%

RPM
2000
1500
1000
500

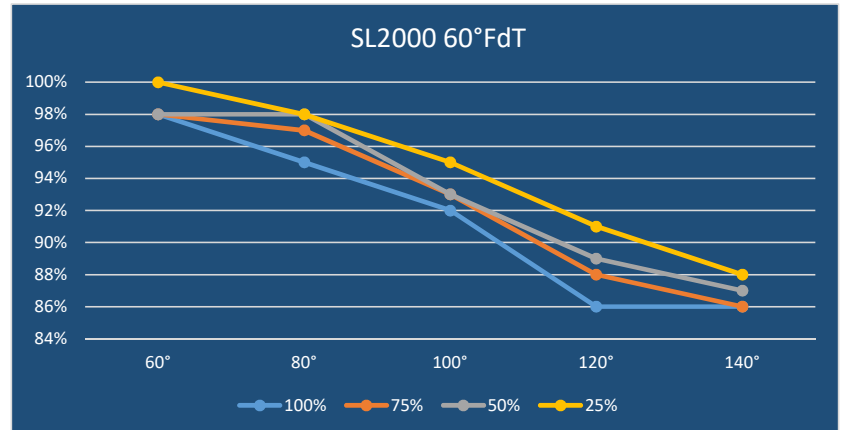


SL2500

Return Water Temperature


20° ΔT

	60°	80°	100°	120°	140°	160°	180°	RPM	MBtu
100%	99%	98%	95%	88%	87%	86%	86%	2500	2500
75%	99%	98%	95%	89%	87%	86%	86%	1875	1875
50%	99%	98%	95%	90%	87%	88%	87%	1250	1250
25%	100%	98%	98%	93%	88%	89%	87%	625	625

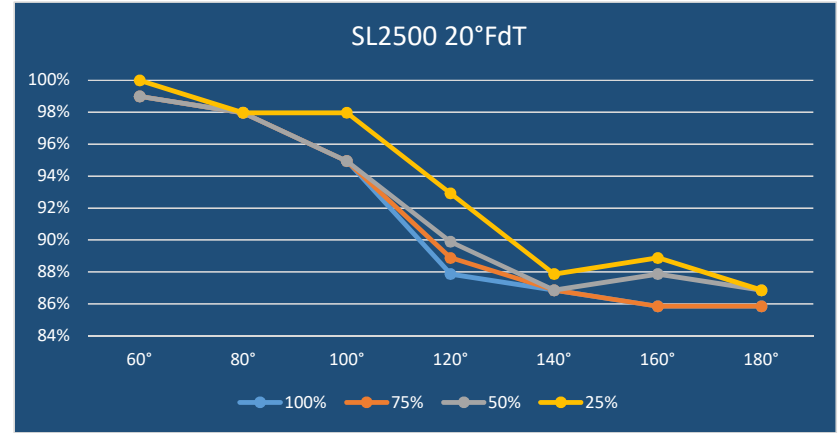


40° ΔT

	60°	80°	100°	120°	140°	160°	RPM	MBtu
100%	98%	98%	95%	92%	89%	87%	2500	2500
75%	98%	99%	96%	92%	89%	87%	1875	1875
50%	99%	99%	96%	93%	89%	88%	1250	1250
25%	100%	99%	96%	93%	90%	88%	625	625

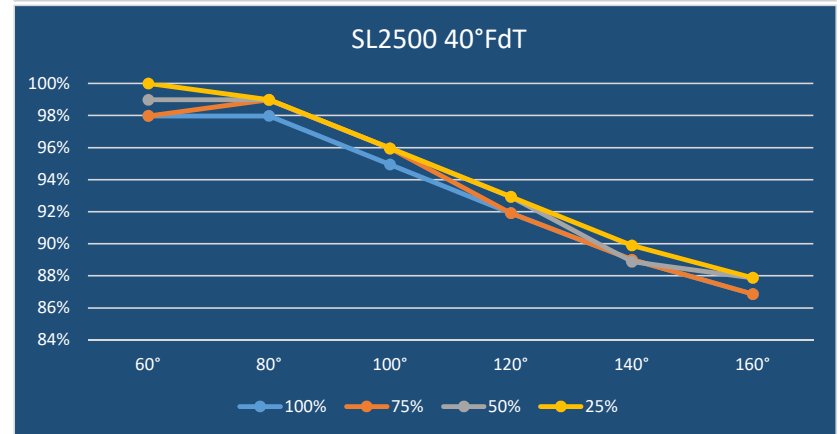

60° ΔT

	60°	80°	100°	120°	140°	RPM	MBtu
100%	99%	96%	93%	87%	87%	2500	2500
75%	99%	98%	94%	89%	87%	1875	1875
50%	99%	99%	94%	90%	88%	1250	1250
25%	100%	99%	96%	92%	89%	625	625

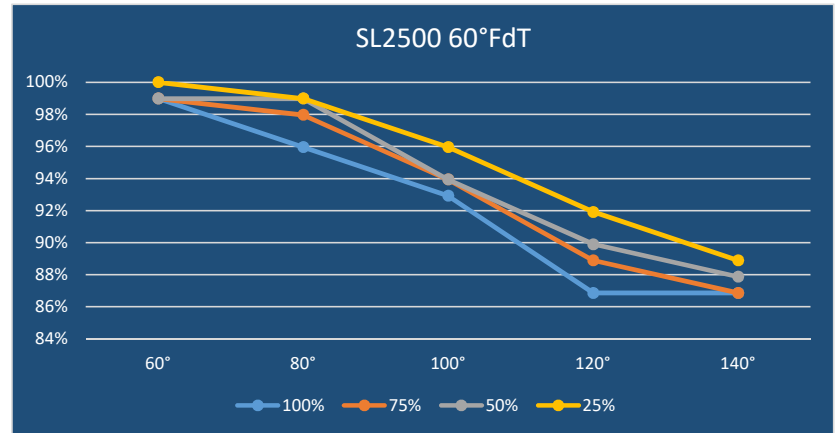


SL3000

Return Water Temperature


20° ΔT

	60°	80°	100°	120°	140°	160°	180°	RPM	MBtu
100%	99%	97%	94%	87%	86%	85%	85%	3000	3000
75%	99%	97%	94%	88%	86%	85%	85%	2250	2250
50%	99%	97%	94%	89%	86%	87%	86%	1500	1500
25%	100%	97%	97%	92%	87%	88%	86%	750	750

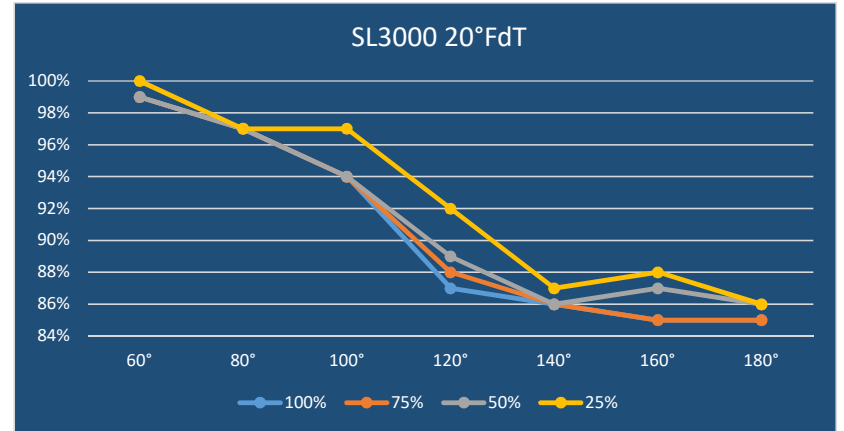

40° ΔT

	60°	80°	100°	120°	140°	160°	RPM	MBtu
100%	97%	97%	94%	91%	88%	86%	3000	3000
75%	97%	98%	95%	91%	88%	86%	2250	2250
50%	98%	98%	95%	92%	88%	87%	1500	1500
25%	100%	98%	95%	92%	89%	87%	750	750

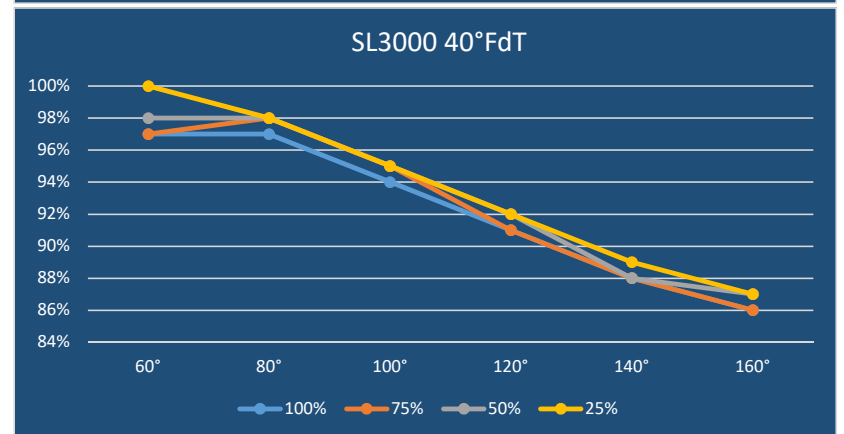

60° ΔT

	60°	80°	100°	120°	140°	RPM	MBtu
100%	98%	95%	92%	86%	86%	3000	3000
75%	98%	97%	93%	88%	86%	2250	2250
50%	98%	98%	93%	89%	87%	1500	1500
25%	100%	98%	95%	91%	88%	750	750

